




## ECOSHIELD PRO SERIES Advanced Purification System

4011, 4014, 4035, & 4037 Purifier Models

## ECOSHIELD PRO XL SERIES Advanced Purification System


4022, 4028, 4044, & 4050 Purifier Models

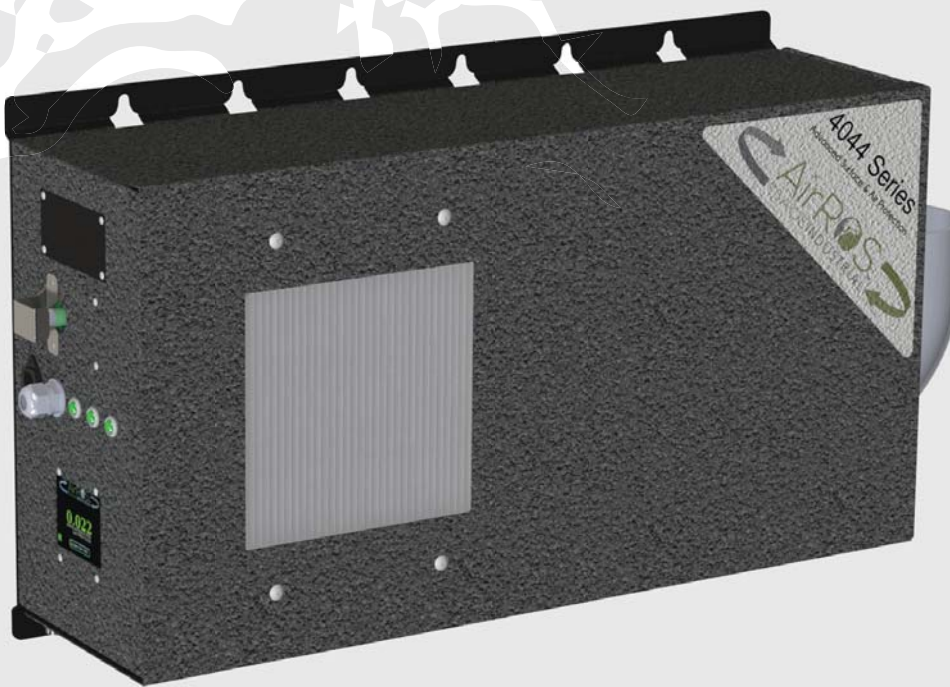

- Plug and play installation and activation
- Ultra-Low Energy efficiency <math><1.67\text{Amps}</math> (200w 120V 1PH)
- Touch screen controller
- Dynamic monitoring control with internal/external controller and sensor
- Easy maintenance
- Logging on microSD for reporting
- Portable Option

How it Works:

**Existing Air  
(Containing Microorganisms)**

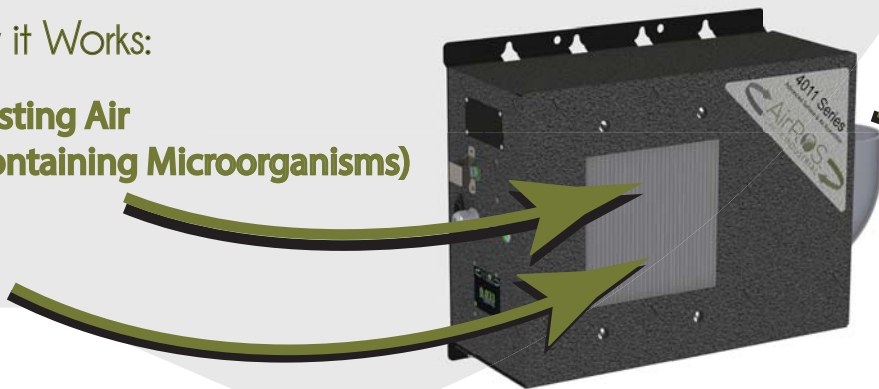

**ROS  
(Reactive Oxygen Species)**

AirROS purifiers utilize electricity and create ROS. The highly-reactive ROS inside the purifier DESTROYS Molds, Pathogens, Viruses, and Odors as they pass through the chamber.

The sanitized air that comes out of the purifier enters the environment and continues to sanitize ALL surfaces it contacts.

# EcoSHIELD PRO Surface & Air Purifiers will sanitize indoor air & surfaces in rooms 1,100-50,000 cubic feet using less than 1.67Amps (200 watts)

## ► Model Number

4011	11,000 ft <sup>3</sup> *	4022	22,000 ft <sup>3</sup> *
4014	14,000 ft <sup>3</sup> *	4028	28,000 ft <sup>3</sup> *
4035	35,000 ft <sup>3</sup> *	4037	37,000 ft <sup>3</sup> *
4044	44,000 ft <sup>3</sup> *	4050	50,000 ft <sup>3</sup> *
C	Controller - Touch Screen Controller		
S	Sensor - Ozone +		
P	Portable - Handle/feet		
I	Internal Controller option		
T	Transparent Controller Lid w/ SS Latch		
R	Remote Sensor option		

+ Internal or External sensor required for dynamic control

\* Actual Capacity depends on Oxygen level, Temp, and Commodity factors

## ► Benefits:

- Destroys Mold, Bacteria, Yeast, Pathogens, & Viruses
- Eliminates/neutralizes Odor
- Organic no-chemicals added
- Reduces cross-contamination
- Ultra-low power consumption

### Example Configurations:


4037CS  
4037C-P  
4044/4000CSI  
4050/4000CIT/4000S

Standard Wall Mount

4inch (4.5"OD) PVC Sch40 Output



40YYCS

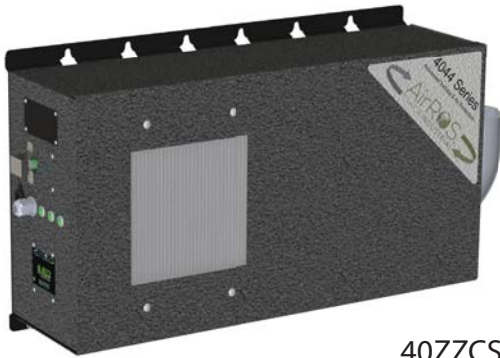

40ZZCS



4000CSE



4000CSI  
4000S



4000CITR

PRO SERIES

PRO XL SERIES

4000C SERIES

Model	Capacity ft <sup>3</sup>	Dimensions	Amps	Watts
4011	11,000	24w x 17h x 9d	0.642 - 0.768	92
4014	14,000	24w x 17h x 9d	0.645 - 0.845	101
4035	35,000	24w x 17h x 9d	0.662-1.443	173
4037	37,000	24w x 17h x 9d	0.662-1.465	175
4022	22,000	34w x 17h x 9d	0.642-0.894	107
4028	28,000	34w x 17h x 9d	0.642-1.048	125
4044	44,000	34w x 17h x 9d	0.662-1.564	188
4050	50,000	34w x 17h x 9d	0.662-1.668	200
-C			+0.02	+2.4
-S			+0.03	+3.6

Model	Description	Dimensions	Additional Amps	Additional Watts
4000CI(T,R) 4000CS(E,I)	Touch Controller	6w x 6h x 4d	0.02	2.4
4000S	Sensor	6w x 6h x 4d	0.03	3.6



PROUDLY MADE IN THE USA



1865 Herndon Ave. Ste. K126 | Clovis, CA 93611  
T 855.201.SAGE | www.SAGEINDUSTRIAL.com